



Oracle 12c Client Kurulumu

Oracle 12c Client Kurulumu ile ilgili ayrıntılı bilgiye bu dokümandan ulaşılır.

Oracle 12c client kurulumu için öncelikle Client setup indirildikten sonra "Run as Administrator" ile setup çalıştırılır.

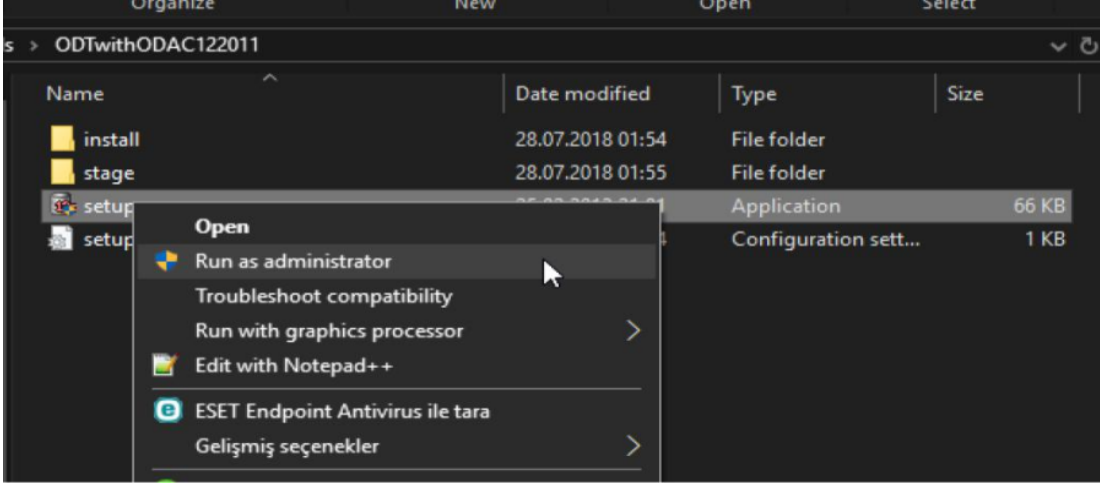

Dil seçenekleri bölümünde kullanılacak diller sağ tarafa aktarılır.

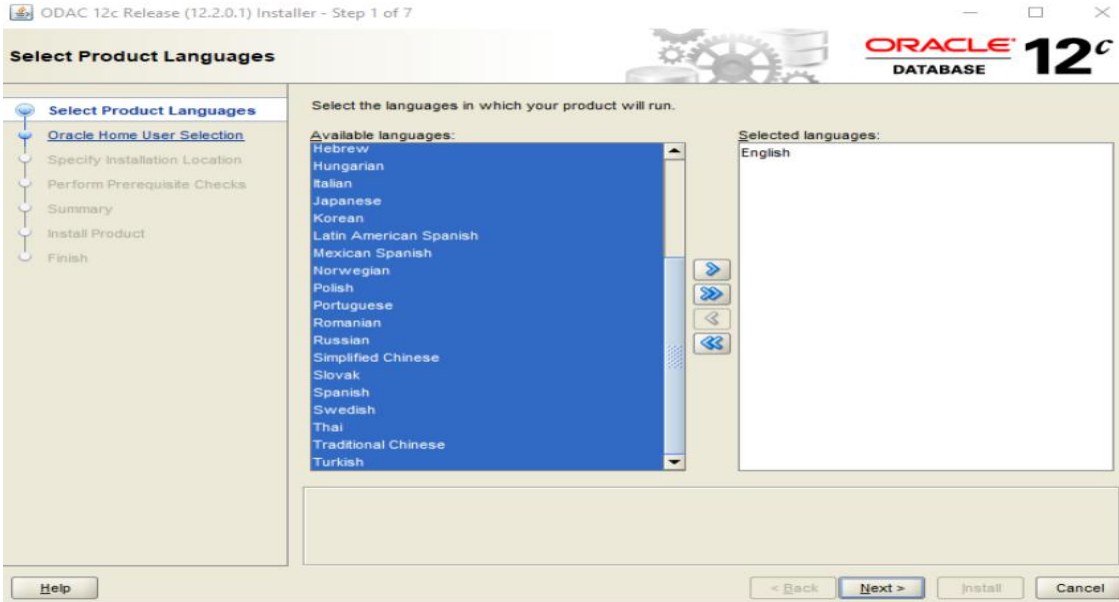

Bu bölümde client için tercihe bağlı olarak yeni bir windows kullanıcısı tanımlanabilir veya built in account ile devam edilebilir.

ODAC 12c Release (12.2.0.1) Installer - Step 2 of 7

Specify Oracle Home User

Use Windows Built-in Account or specify a standard Windows User Account (not an Administrator account) to install and configure the Oracle Home. This account is used for running the Windows Services for the Oracle Home. Do not log in using this account to perform administrative tasks.

☐ Use Existing Windows User:

User Name:

Password:

☐ Create New Windows User:

User Name:

Password:

Confirm Password:

The newly created user is denied Windows login privileges.

☒ Use Windows Built-in Account

Client'in kurulacağı dizin bilgisi, ön değer olarak gelen bilgiler kalabilir.

ODAC 12c Release (12.2.0.1) Installer - Step 3 of 7

Specify Installation Location


Specify an Oracle base path to place all Oracle software and configuration-related files. This location is the Oracle base directory.

Oracle base:

Specify a location for storing Oracle software files. This location is the Oracle home directory.

Software location:

Kurulacak bileşenler ekranında sadece "Oracle Provider fro OLE DB" seçilerek devam edilebilir.

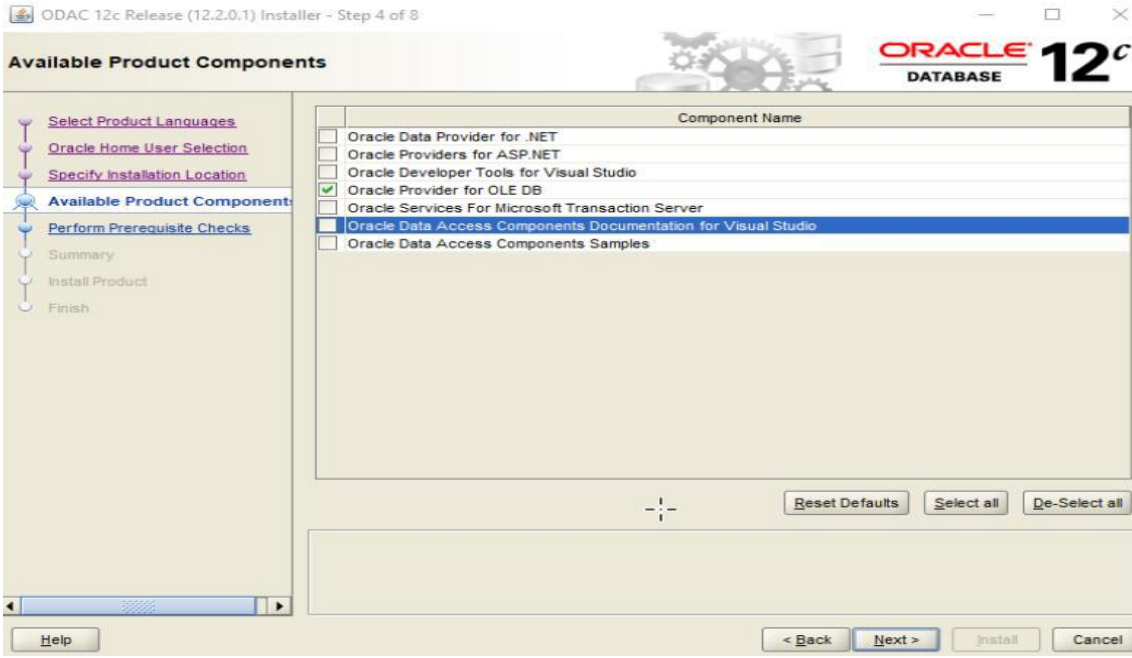

Bu adımda client programının bağlanacağı oracle sunucu bilgileri doldurulur ve buradaki bilgilere göre tnsnames. ora dosyası oluşur.

Connection Alias: Bağlantı bilgilerine verilecek isim, daha sonra ürün veritabanı ayarları yapılırken kullanılır. Herhangi bir isim verilebilir.

Port Number: Oracle db port numarası, öndeğer (default) port otomatik gelir. (Firma DB yöneticisinden öğrenebilirsiniz)

Database Host Name: Oracle DB'nin IP adresi yazılır. (Firma DB yöneticisinden öğrenebilirsiniz)

Database Service Name: Oracle DB'nin servis adı yazılır. (Firma DB yöneticisinden öğrenebilirsiniz)

DB Connection Configuration

ORACLE
DATABASE 12^c

- Select Product Languages
- Oracle Home User Selection
- Specify Installation Location
- Available Product Components
- DB Connection Configuration**
- Perform Prerequisite Checks
- Summary
- Install Product
- Finish

In order to be able to connect to an Oracle Database, a connection alias should be created within C:\app\client\CihanT\product\12.2.0\client_2\Network\Admin\TNSNAMES.ORA.

This dialog will assist you in creating this TNSNAMES.ORA file.

Please enter your database connection information in the fields below. If any field is left blank, the TNSNAMES.ORA file will not be created. Most databases use port 1521. The Service Name for Oracle Database Express Edition defaults to "XE".

Connection Alias (eg. MyDB)	LOGO
Port Number	1521
Database Host Name	172.16.51.129
Database Service Name (eg. ORCL)	orcl

Help

< Back

Next >

Install

Cancel

Son adım install adımı, client kurulumu başlar.



Summary

- [Select Product Languages](#)
- [Oracle Home User Selection](#)
- [Specify Installation Location](#)
- [Available Product Components](#)
- [DB Connection Configuration](#)
- [Perform Prerequisite Checks](#)
- Summary**
- [Install Product](#)
- [Finish](#)

ODAC 12c Release (12.2.0.1) Installer

Global Settings

Source Location: C:\Users\CihanT\Desktop\INDS\Oracle_dokuman_oracle_setup\ODTwithODAC122011\install\stage\product

Install Type: Custom

Oracle Home location: C:\app\client\CihanT\product\12.2.0\client_2 [\[Edit\]](#)

Oracle Home User Selection: NT AUTHORITY\LOCAL SERVICE [\[Edit\]](#)

[Save Response File...](#)

[Help](#)

< Back

Next >

Install

Cancel